



Instructions for Seat Slider

Photo 1. Secure the sliders onto the seat bracket using the existing studs and secure with the nylock nuts and washers furnished in the hardware package. The handle goes on the right hand side.





Photo 2. Start the carriage bolts into the square holes and then center the sliders on their brackets; they should be even across from each other. These are universal sliders so it will be necessary to straighten one side of the pull spring and reset the length.

Photo 3. Place the spacers furnished in your kit over the carriage bolts. You can now bolt on the seat plates.

Photo 4. Start the carriage bolts into the square holes and set the seat plate over the bolts – make sure the angle is facing down- Secure with the nylock nuts and washers.

You are now ready to bolt the seat onto the assembly.

NOTE: This slider / seat bracket is designed for a standard width and length seat; 14" width, by 18" length tab spacing. If you have purchased an optional wider seat you will need to make new top holes in the seat plate.

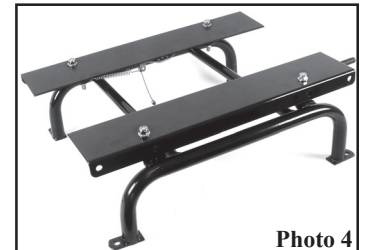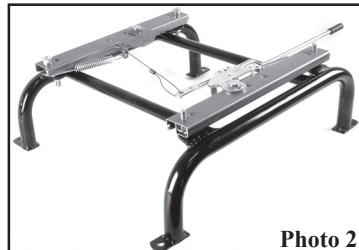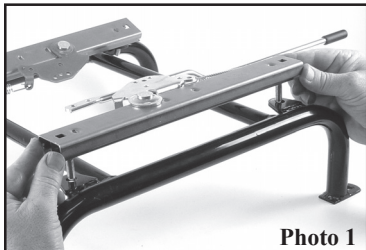

99-4325/0406



Instructions for Seat Slider

Photo 1. Secure the sliders onto the seat bracket using the existing studs and secure with the nylock nuts and washers furnished in the hardware package. The handle goes on the right hand side.



Photo 2. Start the carriage bolts into the square holes and then center the sliders on their brackets; they should be even across from each other. These are universal sliders so it will be necessary to straighten one side of the pull spring and reset the length.

Photo 3. Place the spacers furnished in your kit over the carriage bolts. You can now bolt on the seat plates.

Photo 4. Start the carriage bolts into the square holes and set the seat plate over the bolts – make sure the angle is facing down- Secure with the nylock nuts and washers.

You are now ready to bolt the seat onto the assembly.

NOTE: This slider / seat bracket is designed for a standard width and length seat; 14" width, by 18" length tab spacing. If you have purchased an optional wider seat you will need to make new top holes in the seat plate.

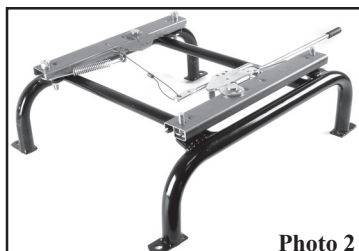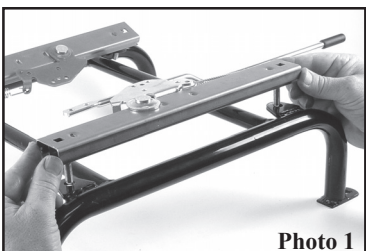

99-4325/0406